

# PCBX

Combination Exit and Emergency Light  
LED

Project Name:	
Type:	Notes:
Catalog #:	



### FEATURES:

– For commercial, retail and industrial applications that require exit signage and emergency lighting, utilizing energy efficiency while providing a compact, low-profile design.

### SPECIFICATIONS:

**CONSTRUCTION** – Injection-molded, V-O flame retardant, high impact, thermoplastic housing with universal K.O. chevrons.


**MOUNTING** – Universal mounting canopy included for top installation.

**ILLUMINATION** – Energy saving illumination is provided with high output, low power consumption LEDs with less than 2 watts for red letters and less than 1 watts for green letters. Two fully adjustable, glare-free, 5.6 watts, lighting heads standard.

**ELECTRICAL** – Fully automatic operation with low voltage disconnect (LVD). 120 or 277 VAC. AC indicator light and test switch are standard. 6-volt pure lead, maintenance-free battery. Emergency operation for 90 minutes.

**WARRANTY** – Five year warranty on materials and electronics.

**LISTINGS** – UL Damp Listed.

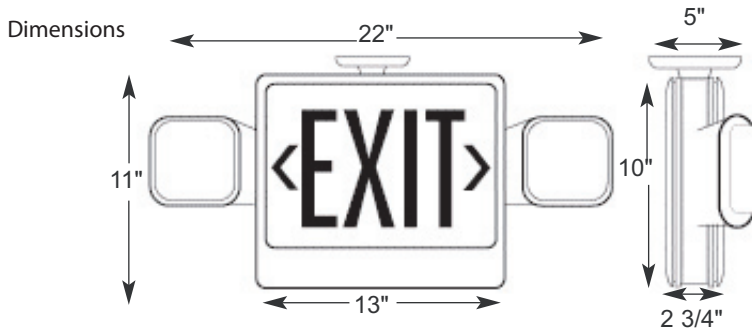


Adjustable lamp heads rotate 180° for maximum field flexibility.

### Ordering Matrix and Options

Example:

**PCBX U 2 G W EM**

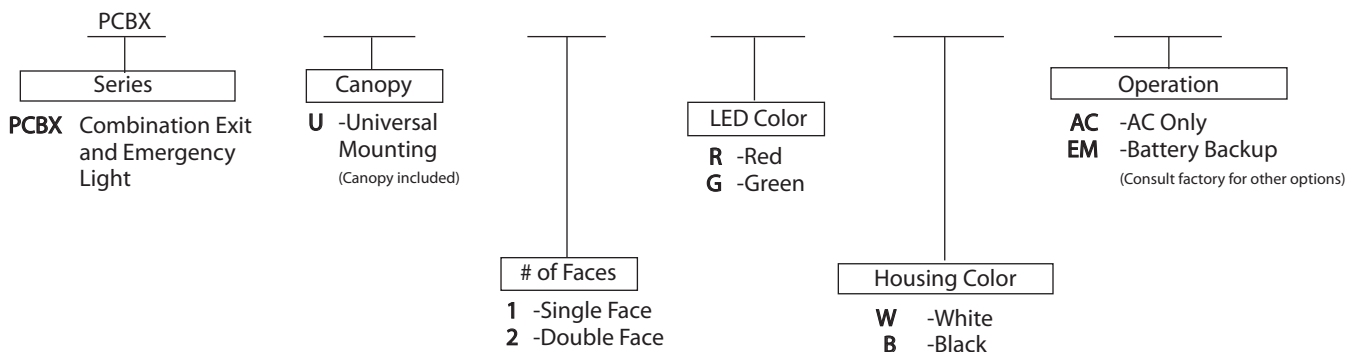

Manufacturer reserves the right to make changes to specifications without notice.