

PDX

Die-Cast Aluminum LED Exit Sign

LED

Project Name:	
Type:	Notes:
Catalog #:	



FEATURES:

– For specification and high-end applications, utilizing a unique illumination design in an architectural housing.

SPECIFICATIONS:

HOUSING – Die-cast aluminum construction with universal K.O. chevrons.

FINISH – Brushed aluminum finish is sealed with a low glare laquer to protect finish. Black or white finishes are powder coated.

MOUNTING – Universal K.O.s on back-plate to fit most standard sizes boxes for back and wall mounting. Ceiling or end-mounting types are supplied with a universal mounting canopy/J-box cover.



ILLUMINATION – Energy saving illumination is provided with high output, low power consumption LEDs. 12 LEDs are used on red lettered types and 6 LEDs are used on green lettered types. LED rated lamp life of 70,000 hours minimum.

ELECTRICAL – 120/277 input transformers are standard on all units. Emergency operation for 90 minutes. Maintenance-free Ni-Cd batteries. PCB/LED board acts as solid-state charger. AC indicator lighting and pilot light/test switch are standard on these units. Separate self-diagnostic testing is optional.

WARRANTY – Five year warranty on materials and electronics.

LISTINGS – UL 924 Listed. NPFA 101.

Dimensions

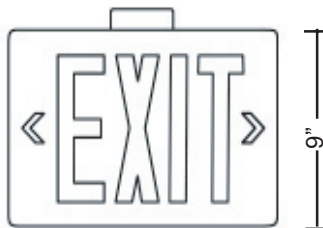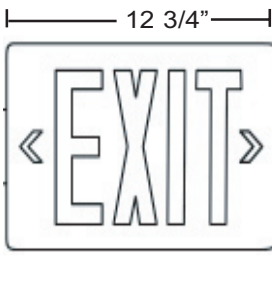


Model Configuration	Wattage
PDX 1 R __ EM	3.6W
PDX 2 R __ EM	3.6W
PDX 1 G __ EM	4.4W
PDX 2 G __ EM	4.4W

Ordering Matrix and Options

Example:

PDX 2 R W W EM

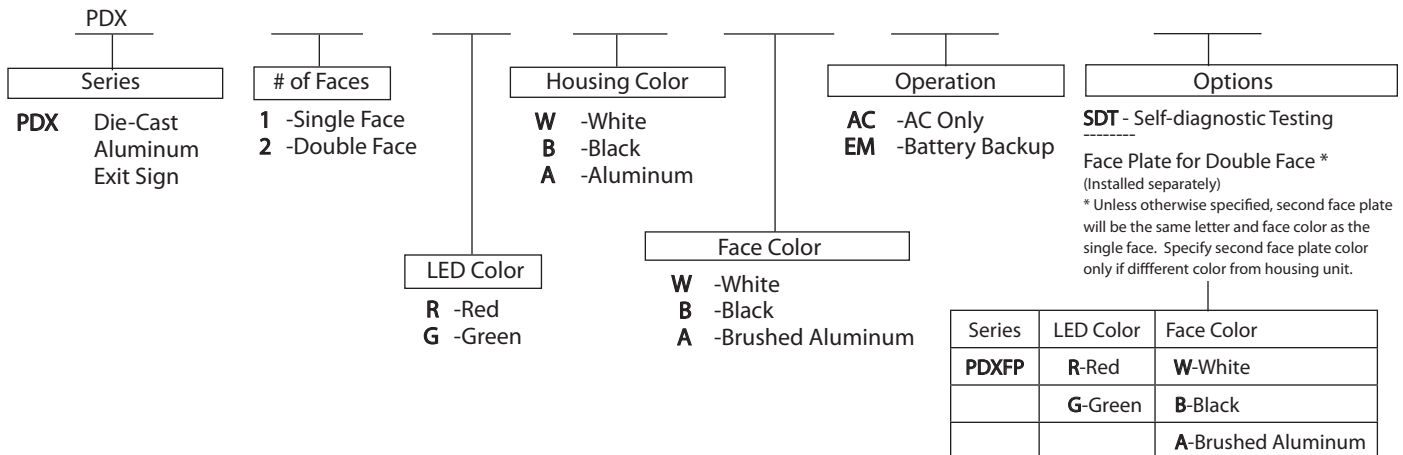

Manufacturer reserves the right to make changes to specifications without notice.