

# PWLXTE / PCWLXTE

Wet Location LED Exit Sign and Combo Unit

LED

Project Name:	
Type:	Notes:
Catalog #:	



PWLXTE




PCWLXTE



**PWLXTE and PCWLXTE Series exit signs feature an enclosure resistant to corrosive atmospheres, non-hazardous dust environments and to water spray, splash, or where hose downs frequently occur.**

## Dimensions

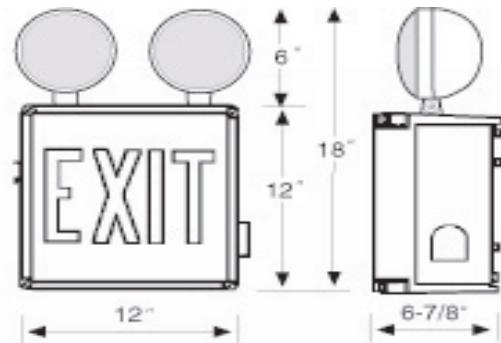

## Features

- AC only or self-powered models.
- Universal 120/277 VAC Operation.
- Removable directional indicators.
- Extremely low operating costs.
- 25 year light source life expectancy.
- Meets NFPA Life Safety 101, NEC, OSHA, NEC, Local and State Codes.
- Wet location 0° C - 40° C.
- ABS, corrosion resistant UV stabilized enclosure.

## Ordering Information

### Wet Location

Catalog Model #	Letter Color	Voltage Input	Lamp Type	Emergency Operation	Warranty
<b>PWLXTER</b> (AC Only)	Red	120V/277V	LED	AC Only	Yes
<b>PWLXTEG</b> (AC Only)	Green	120V/277V	LED	AC Only	Yes
<b>PWLXTEREM</b>	Red	120V/277V	LED	90 Mins.	Yes
<b>PWLXTEGEM</b>	Green	120V/277V	LED	90 Mins.	Yes
<b>PCWLXTEREM</b> (Combo)	Red	120V/277V	LED	90 Mins.	Yes
<b>PCWLXTEREM</b> (Combo)	Green	120V/277V	LED	90 Mins.	Yes

- Both the PWLXTE and PCWLXTE Series and the internal battery (where applicable) carry a warranty of one year to be free from defective material and workmanship. The battery is pro-rated for a 5-year period when operated at normal ambient temperatures.

Manufacturer reserves the right to make changes to specifications without notice.