

# PXT

## Thermoplastic LED Exit Sign

LED

Project Name:	
Type:	Notes:
Catalog #:	



### FEATURES:

– For general, low-profile applications, utilizing energy efficiency while providing a slim and clean design.

### SPECIFICATIONS:

**CONSTRUCTION** – Injection-molded, V-O flame retardant, high impact, thermoplastic housing with universal K.O. chevrons.

**MOUNTING** – Universal mounting canopy included for side or top installation.

**ILLUMINATION** – Energy saving illumination is provided with high output, low power consumption LEDs with less than 4 watts for red letters and less than 2 watts for green letters.

**ELECTRICAL** – Fully automatic operation with low voltage disconnect (LVD). 120 or 277 VAC. AC indicator light and test switch are standard. NiCad battery on emergency models. Emergency operation for 90 minutes.

**WARRANTY** – Five year warranty on materials and electronics.

**LISTINGS** – UL Damp Listed.







Dimensions



### Ordering Matrix and Options

Example:

**PXT U 2 G W EM**

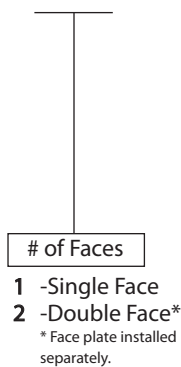

Manufacturer reserves the right to make changes to specifications without notice.