


SM14

Surface Mounted 1x4 Static Troffer

1, 2, or 3 Lamps

Project Name:	
Type:	Notes:
Catalog #:	

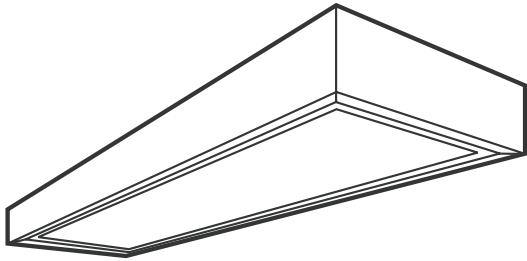

FEATURES:

– For surface mounting applications. Optimized performance for T8 lamp technology. Twist-lock lampholders are standard.

SPECIFICATIONS:

HOUSING – Heavy gauge, die-formed, cold-rolled steel. Spot-welded for rigidity and clean appearance.

DOOR FRAME – Fully gasketed and flush steel door frame with standard cam latches and sturdy door hinges.

FINISH – Multi-stage phosphate treated for maximum adhesion and rust resistance. Finished with high-gloss, baked white enamel.

SHIELDING – Clear 0.100" nominal thick, #12 acrylic prismatic lens. Other lenses are optional.

ELECTRICAL – Energy efficient, thermally protected, Class P, HPF, sound rated A, UL Listed, electronic ballasts are standard on all models.

LISTINGS – UL Listed (standard).

Dimensions



Fixture length is 48".

Ordering Matrix and Options

Example:

SM14 232 A125 UNV EB EM

Series	Lamp Type	Door Frame	Options
SM14 1x4 Surface Mounted Box	32 32w T8 (48")	blank flush steel FW flush white aluminum RW regressed white aluminum TS tamperproof steel <small>(Consult factory for other options)</small>	EB -electronic ballast, <10% THD EB10IS -electronic ballast, <10% THD, instant start EB10RS -electronic ballast, <10% THD, rapid start EB2 -two electronic ballasts* EM -emergency battery pack DIM -dimmer ballast (electronic) TL -twist-lock lamp sockets LPI () -lamp included (specify lamp type and color) <small>(Consult factory for other options)</small> <small>See supplemental page for option details.</small> <small>*Single ballast standard unless this option selected.</small>
#ofLamps	Diffuser Type	Voltage	
1 1 lamp 2 2 lamp 3 3 lamp	blank #12 pattern acrylic 0.100" thick A125 #12 pattern acrylic 0.125" thick A156 #19 pattern acrylic 0.156" thick PC15 1/2" x 1/2" x 1/2" plastic cube louver, silver PC25 1-1/2" x 1-1/2" x 1" plastic cube louver, silver DP drop dish (opal lens) VRL impact resistant, "virtually indestructible", 0.375" thick (0.187" polycarbonate / 0.187" acrylic) <small>(Consult factory for additional options)</small>	120 120V 277 277V UNV 120/277V <small>(Others available)</small>	

Patriot Lighting reserves the right to make changes to specifications without notice.



Tel: 323-622-1133 Fax: 323-622-1135 Web: www.patriotltg.com