

OUTDOOR LIGHTING

Project Name:	
Type:	Notes:
Catalog #:	

FL65 - Large Floodlight




Applications

For surface mounted applications such as building, outdoor bulletin boards, sports field, highway signs and other general floodlighting applications.


Specification & Features

- Heavy-duty die-cast aluminum housing construction.
- Heat and impact-resistant tempered glass lens.
- Small or large yoke/trunnion mount, slip-fitter mount or wall-mounting bracket available.
- Provided with 95% reflective anodized aluminum reflector for optimum light distribution.
- High-Powered Factor (HPF) ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- Silicon rubber gasketing to prevent any leakage from the outside.
- Dark bronze finish is standard. Other finishes optional.
- Available in CFL, HPS or Pulse Start Metal Halide lamp types.
- UL, ETL or CSA Listed for Wet Location.

Dimensions

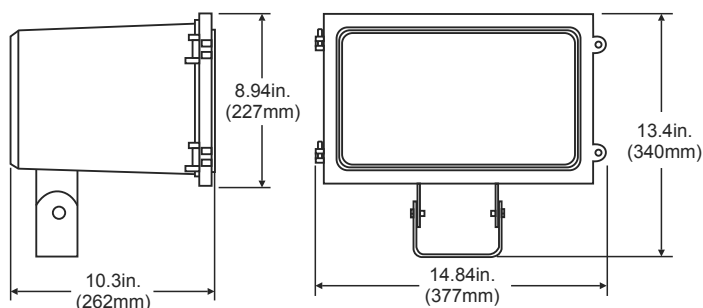

Accessories

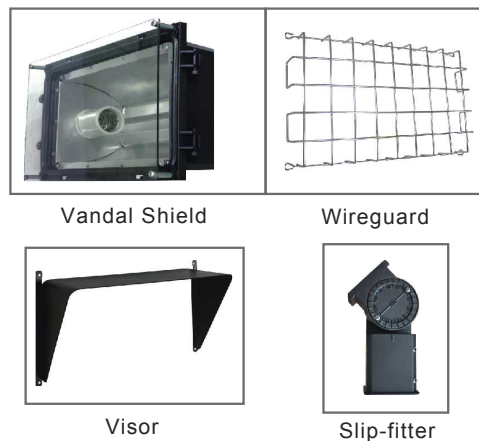

Ordering Information

Example: PHBE AL16 400 P QV DL LPI

Series	Mounting	Wattage	Ballast Type	Voltage	Options
PFL65 - Large Floodlight	SY - Small Trunnion	100 - 100W*	M - Metal Halide*	120 - 120V	WG - Wire Guard
	LY - Large Trunnion	150 - 150W**	P - Pulse Start	277 - 277V	VDS - Vandal Shield
	SF - Slip-fitter	175 - 175W**	Metal Halide	DV - 120 / 277V	VSR - Visor
		250 - 250W	(HPF-CWA)**	QV - Quad Voltage (Consult factory for other voltages.)	PC() - Photocell (Indicate voltage)
		400 - 400W (100W M.H. is Mogul base lamp. **150W recommended instead of 175W on Pulse Start type.)	H - High Pressure Sodium (HPF-CWA) (*100W is Metal Halide. **150W or higher in Metal Halide is Pulse Start type.)		WHT - White Finish
					QRS - Quartz Restrike LPI - Lamp included (Consult factory for additional options, accessories or other color finishes.)

Manufacturer reserves the right to make changes to specifications without notice.

Revised 08/2015



Tel: 213-741-9757 Fax: 213-747-2340 Web: www.patriotltg.com