

Project Name:	
Type:	Notes:
Catalog #:	

PSM354 - Outdoor Vandal Resistant





Applications

For surface wall mounted applications such as parking areas, entrances, walkways, underpasses, loading docks and recreation areas.

Specification Features

- Heavy-duty polycarbonate housing construction.
- High-impact polycarbonate lens providing superior lighting distribution.
- Standard dark bronze powdercoat finish for maximum rust and corrosion-resistant.
- Silicone rubber gasketing included to prevent leakage from the outside.
- 1/2" tapped holes available for installing optional photocell.
- Available in Metal Halide, HPS and Compact Fluorescent.
- UL listed for wet locations.

Dimensions

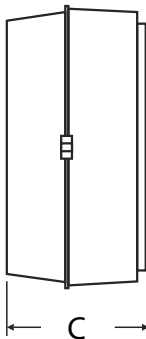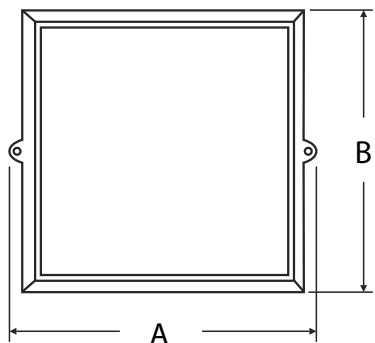

A	B	C
10.63"	9.92"	5.43"

Ordering Information

Example: PSM354 H 70 120 LPI

Series	Ballast Type	Wattage	Voltage	Options
PSM354 - Surface Wall Mounted	M - Metal Halide	2/13 - 2/9W PL	120 - 120V	PC__ - Photocontrol (specify voltage) LPI - Lamp included (Specify lamp type and color) (Consult factory for additional options.)
	H - High Pressure Sodium	50 - 50W MH/HPS	277 - 277V	
	F - Fluorescent	70 - 70W HPS (Consult factory for other configurations.)	DV - Dual-tap QV - Quad-tap Consult factory for other options.)	

Manufacturer reserves the right to make changes to specifications without notice.