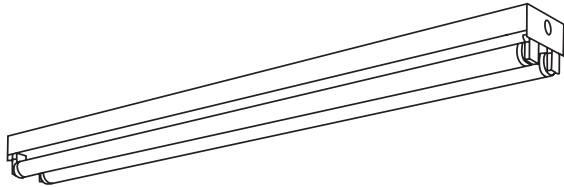


**C****Striplight Channel**

1, 2 or 4 Lamps

Project Name:	
Type:	Notes:
Catalog #:	

**FEATURES:**

– For surface or pendant mounting applications, unit or row installations. Optimized performance for T5 and T8 lamp technology. Twist-lock lamp-holders are standard on medium bi-pin lamp models.


**SPECIFICATIONS:**

**CONSTRUCTION** – Heavy gauge, die-formed, cold-rolled steel. Easy snap-on assembly components, no extra tools required. Fixture available in one or two lamp and tandem configurations. Multiple knockouts for convenient installation.

**FINISH** – Multi-stage phosphate treated for maximum adhesion and rust resistance. Finished with high-gloss, baked white enamel.

**ELECTRICAL** – Energy efficient, thermally protected, Class P, HPF, sound rated A, UL Listed, electronic ballasts are standard on all models. Provided with ballast/luminaire disconnects for convenient maintenance.

**LISTINGS** – UL Listed (standard).

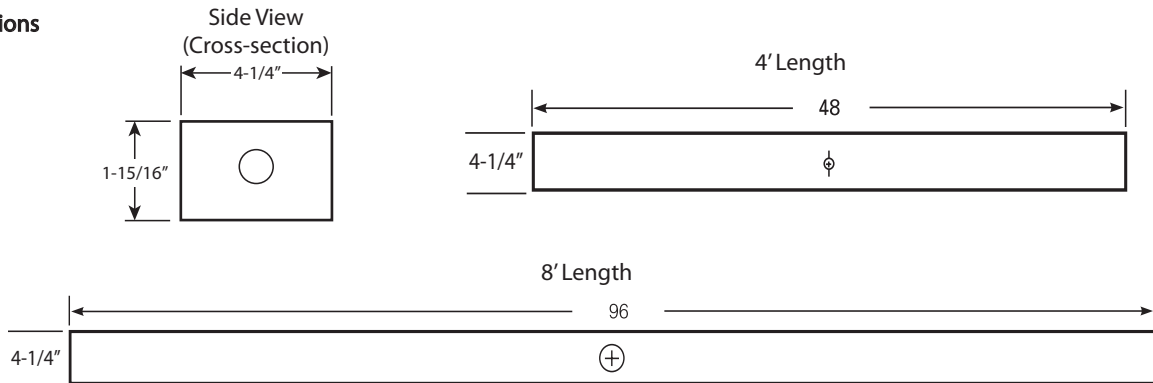**Dimensions****Ordering Matrix and Options**

Series	Size	Lamp Type	# of Lamps
C Striplight Channel *Add "TAN" option for tandem	2 -24"	14T5 14wT5 (22")	1 -1 lamp
	3 -36"	17 17wT8 (24")	2 -2 lamp
	4 -48"	21T5 21wT5 (34")	4 -4 lamp
	8 -96"	25 25wT8 (36")	
		28T5 28wT5 (46")	
	28T8 28wT8 (48")		
	32 32w T8 (48")		
	59 59w T8 (96")		

Voltage	
120	-120V
277	-277V
UNV	-120/277V

(Others available)

Example:

**C8 TAN 232 UNV EB EM**

Options	
<b>EB</b>	-electronic ballast, <10% THD
<b>EB10IS</b>	-electronic ballast, <10% THD, instant start
<b>EB10RS</b>	-electronic ballast, <10% THD, rapid start
<b>EB2</b>	-two electronic ballasts*
<b>EM</b>	-emergency battery pack
<b>DIM</b>	-dimming ballast (electronic)
<b>TL</b>	-twist-lock lamp holders
<b>BD</b>	-ballast/luminaire disconnect
<b>LPI</b> ( )	-lamp included (specify lamp type and color)
<b>SMR</b> ( )	-symmetric reflector (specify length in inches)
<b>ASMR</b> ( )	-asymmetric reflector (specify length in inches)

(Consult factory for other options)  
See supplemental page for option details.  
\*Single ballast standard unless this option selected.

Manufacturer reserves the right to make changes to specifications without notice.