


WB

Wall Brackets

1 or 2 Lamps

| | |
|---------------|--------|
| Project Name: | |
| Type: | Notes: |
| Catalog #: | |

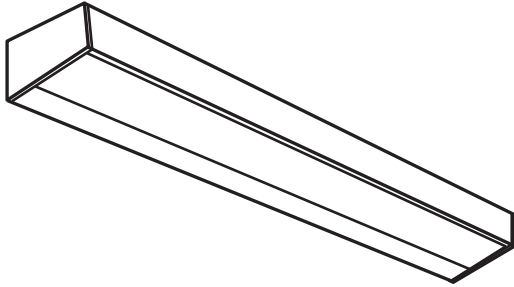

FEATURES:

– For wall mounting, task lighting or restroom applications, providing a contemporary design with convenient installation. Optimized performance for T8 lamp technology.

SPECIFICATIONS:

CONSTRUCTION – Heavy gauge, cold-rolled steel. Fixture standard in two lamp configuration.


DIFFUSER – Snap-in clear linear prismatic acrylic lens is standard. Other lenses optional.

FINISH – Multi-stage phosphate treated for maximum adhesion and rust resistance. Finished with high-gloss, baked white enamel.

ELECTRICAL – Energy efficient, thermally protected, Class P, HPF, sound rated A, UL Listed, electronic ballasts are standard on all models. Provided with pushwire wall-nuts or luminaire disconnects for convenient installation.

LISTINGS – UL Listed (standard).

Dimensions

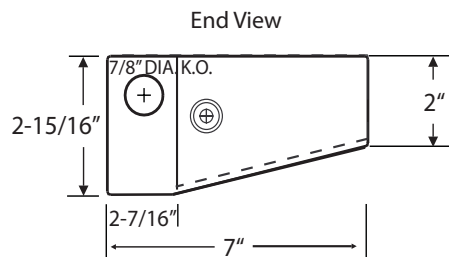


Top View

24-1/4" = 2 ft.

36-1/4" = 3 ft.

48-1/4" = 4 ft.

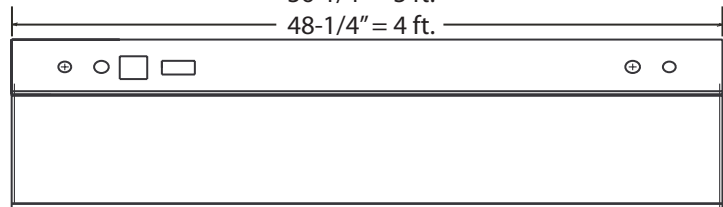

Ordering Matrix and Options

Example:

WB 232 UNV EB

| WB | | | Options | |
|------------------------|------------|------------------|---|--|
| Series | # of Lamps | Lamp Type | Options | |
| WB Steel Wall Brackets | 1 -1 lamp | 17 -17w T8 (24") | Diffuser blank -clear prismatic acrylic DRC -100% DR clear acrylic DRW -100% DR white acrylic (Consult factory for other options.) | EB -electronic ballast, <10% THD EB10IS -electronic ballast, <10% THD, instant start EB10RS -electronic ballast, <10% THD, rapid start EM -emergency battery pack DS -luminaire disconnect LPI () -lamp included (specify lamp type and color) (Consult factory for other options.) |
| | 2 -2 lamp | 25 -25w T8 (36") | | |
| | | 32 -32w T8 (48") | | |
| | | | Voltage | |
| | | | 120 -120V | |
| | | | 277 -277V | |
| | | | UNV -120/277V | |
| | | | (Others available) | |

Manufacturer reserves the right to make changes to specifications without notice.