

# SEN

Senator Wall Mount Series – Indirect Linear Architectural

Project:	
Type:	Catalog #:



## FEATURES:

– For individual or continuous row, wall mounting applications such as corridors, hospital corridors and small offices. Optimized performance for T5/T8 lamp technology. Twist-lock lampholders are standard.

## SPECIFICATIONS:

**HOUSING** – Heavy 20 gauge, die-formed, cold-rolled steel. Perforated body is standard. Solid body is available.

**FINISH** – Multi-stage phosphate treated for maximum adhesion and rust resistance. Powder-coated white finish is standard. Other finishes are available.

**REFLECTOR** – Standard with enhanced aluminum silver reflector. White reflector is available.

**ELECTRICAL** – Energy efficient, thermally protected, Class P, HPF, sound rated A, UL Listed, electronic ballasts are standard on all models. Provided with ballast disconnect for convenient installation.

**LISTINGS** – UL Listed (standard).

## Ordering Matrix and Options

**Example: SEN W 232T8 4 UNV EB**

<b>SEN W</b>	<b>Product Series</b> SEN W = Senator Wall Mount Series		<b># of Lamps (per Cross-section)</b> 2 = 2-lite
	<b>Lamp Type</b> 28T5 = 28w T5 (46") 32T8 = 32w T8 (48") 54T5HO = 54w T5 HO (46")		<b>Length</b> 4 = 4 ft. (nominal) 8 = 8 ft. (nominal) <sup>1</sup> <small><sup>1</sup> Lamping for 8 ft. length is tandem configuration. (Consult factory for other lengths.)</small>
	<b>Distribution Type</b> (blank) = Perforated Body SOL = Solid Body		<b>Reflector</b> (blank) = Aluminum Reflector WH = White Reflector
	<b>Voltage</b> 120 = 120V 277 = 277V UNV = 120 to 277V (Others available)		<b>Ballast and Options</b> EB = Electronic ballast, < 10% THD EB10IS = Electronic ballast, < 10% THD, instant start EB10RS = Electronic ballast, < 10% THD, rapid start EB2 = Two electronic ballasts* EM = Emergency battery pack (specify voltage) DIM = Dimming ballast (electronic) PG = Push-In-Ground™ BD = Ballast Disconnect LPI ( ) = Lamp included (specify lamp type and color) <small>(Consult factory for other options and paint finishes.) See supplemental page for option and accessories. *Single ballast standard unless this option selected.</small>

### Ordering Instructions

#### Individual Mounting:

1. Order number of UNITS required.
2. Order one END SET per UNIT.

#### Continuous Row Mounting:

1. Determine run length.
2. Order the appropriate number of UNITS for the complete run.
3. Order one END SET per run.

(Joiner built into lighting fixture. No additional joiner accessories required.)

Manufacturer reserves the right to make changes to specifications without notice.




# SEN

Senator Wall Mount Series – Indirect Linear Architectural


Project:	
Type:	Catalog #:

## Dimensions

Size (Nominal)	L	W	H
4 ft. (T5)	49-1/4"	5-1/32"	2-11/16"
4 ft. (T8)	49-1/4"	5-1/32"	2-11/16"
8 ft. (T5)	98"	5-1/32"	2-11/16"
8 ft. (T8)	98"	5-1/32"	2-11/16"

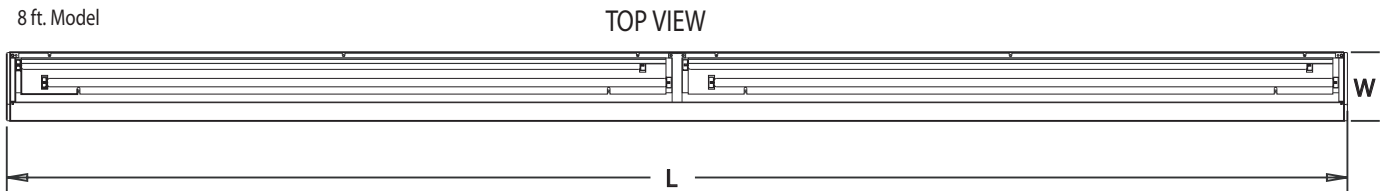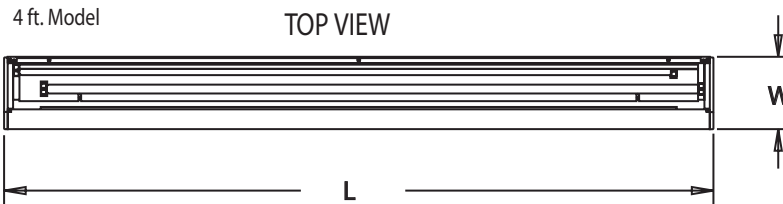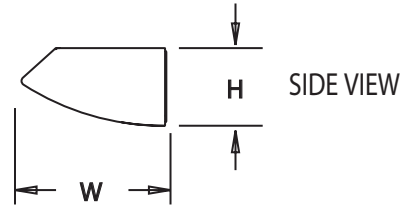

## Accessories



**SENWEC** = End Cap set  
(pair of left and right plate  
to complete the run)<sup>2</sup>

<sup>2</sup> Purchase accessories separately.

Manufacturer reserves the right to make changes to specifications without notice.