


HBF

High Bay Fluorescent

2, 4 or 6 Lamps

Project Name:	
Type:	Notes:
Catalog #:	

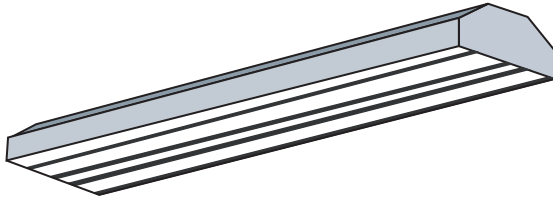

FEATURES:

– For surface or pendant mounting, high-efficiency, cost-effective lighting applications. Optimized performance for T5 or T8 lamp technology. Twist-lock lampholders are standard.

SPECIFICATIONS:

HOUSING – Heavy gauge, die-formed, cold-rolled steel. Aluminum housing optional. Available in tandem (8 ft.) housing.

DOOR FRAME – Non-door frame standard. Door frame with diffuser optional.

FINISH – Multi-stage phosphate treated for maximum adhesion and rust resistance. Finished with powder-coated, high-gloss, baked white enamel.

REFLECTOR – Miro 4 anodized or white aluminum reflector available for optimum light distribution and efficiency.




ELECTRICAL – Energy efficient, thermally protected, Class P, HPF, sound rated A, UL Listed, electronic ballasts are standard on all models. Provided with ballast/luminaire disconnect for convenient installation.

LISTINGS – UL Listed (standard).

Dimensions

Model Configuration	A	B	Length
2-Lite (no frame)	2.628"	7.850"	48.005"
2-Lite (with frame)	3.336"	8.80"	48.005"
2-Lite Tandem (no frame)	2.629"	7.850"	95.909"
2-Lite Tandem (with frame)	3.336"	8.80"	95.943"


Model Configuration	A	B	Length
4-Lite (no frame)	3.78"	13.97"	48.01"
4-Lite (with frame)	4.38"	15.02"	48.01"
6-Lite (no frame)	3.77"	19.82"	48.01"
6-Lite (with frame)	4.324"	21.069"	47.938"

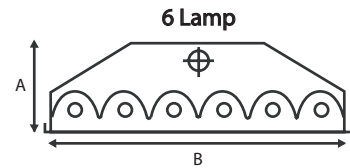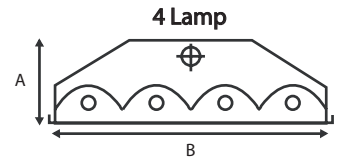

Ordering Matrix and Options

Example:

HBF AL 454T5HO UNV EB

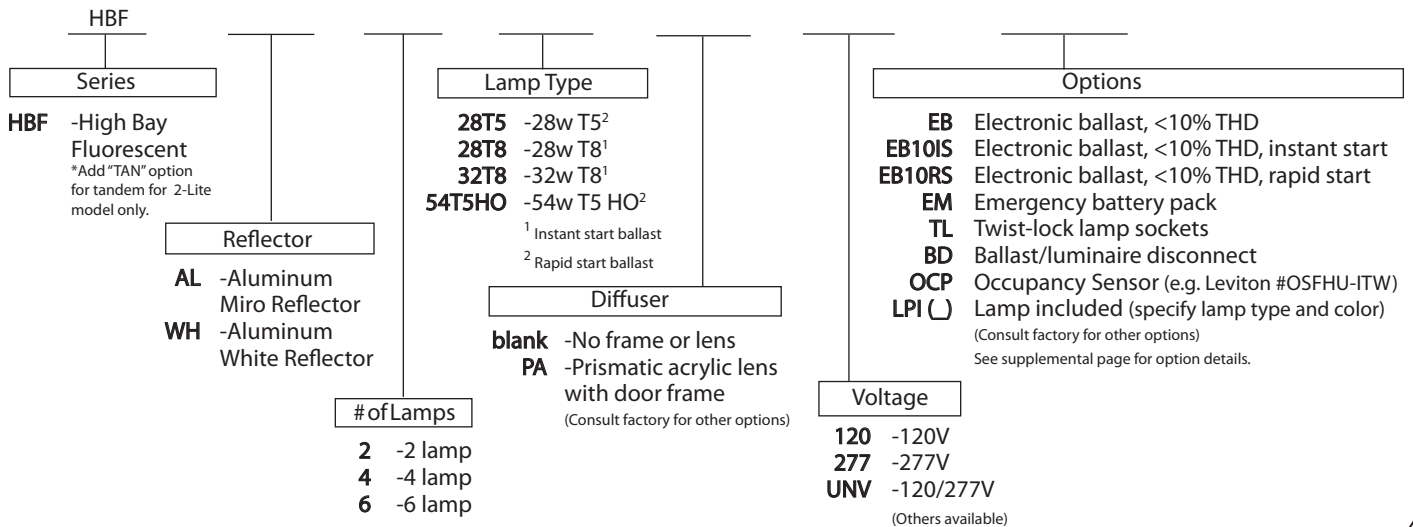

Manufacturer reserves the right to make changes to specifications without notice.