

PRHF8 / PRS803

8" Compact Fluorescent Horizontal Downlight

8" Horizontal Open Reflector

Project:	
Type:	Catalog #:



DESCRIPTION

- Eight inch compact fluorescent recessed horizontal housing for new construction. Must be installed at least 3" away from insulation. UL listed.

FEATURES

- Heavy duty steel frame with die-cast aluminum socket housing with thermoplastic sockets.
- Integral ballast with thermal protector for overlampping.
- Adjustable hanger bars up to 24" and can be repositioned for easy installation.
- (7) 1/2" and (4) Romex knockouts with pry-out slots.
- Junction box UL listed for through-branch circuit wiring.

REFLECTOR

- Semi-specular, low-iridescent aluminum reflector
- Available in various finishes

BALLASTS

Electronic 120/277V ballast:
13/18/26/32/42w, 4 pin, triple tube or quad lamp, UL listed, HPF, Class P, Sound rated A, Starting temperature: 0 degree F, Max. THD: <10%.

EMERGENCY OPTIONS



Emergency battery option available for 90 minute lamp operation. Includes charger, inverter circuit and is factory-installed.

LISTINGS

- UL Damp location listed.
- UL Feed through listed.
- Energy Star¹.

Dimensions

A	Height	5-1/2"
B	Trim Opening	8-1/2"
C	Width	9"
D	Length	13"

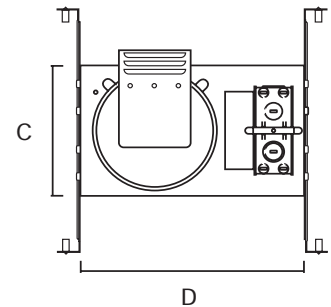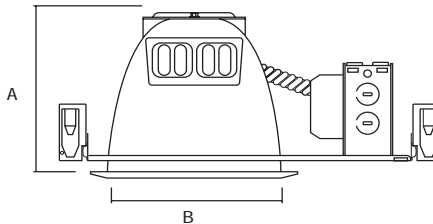

* Keep fixture at least 3" away from insulation.

Ordering Matrix and Options

Series	Lamp Type	Voltage
PRHF8	13 (1) 13w	120 -120V
	18 (1) 18w	277 -277V
	26 (1) 26w	UNV -120/277V (Consult factory for others).
	32 (1) 32w	
	42 (1) 42w	
	213 (2) 13w	
	218 (2) 18w	
	226 (2) 26w	
	232 (2) 32w	
	242 (2) 42w	

Options
EL: Electronic Ballast
EM: Emergency w/ remote test switch
EM2: Emergency w/ test switch in reflector
DIM: Dimming Ballast (electronic)
(Consult factory for other options.)

Example: PRHF8218 120 EL / PRS803C

PRS803	Reflector	Trim
Cat. #	C: Clear W: White G: Gold PWT: Pewter MO: Mocha	blank: White (plastic trim) C: Clear

(Consult factory for other available options and configurations.)

¹Energy Star (Pending).

Manufacturer reserves the right to make changes to specifications without notice.