

PRA5X PL AT / PR50()

5" CFL Downlight Air-Tight IC Rated - New Construction

5" Reflector and Trim

Project:	
Type:	Catalog #:



DESCRIPTION

- Five inch CFL recessed air-tight IC rated downlight for commercial or residential new construction applications. For use insulated ceilings. Designed for direct contact with insulation. UL listed.

FEATURES

- Heavy duty steel frame with 4-Pin thermoplastic sockets.
- Integral ballast with thermal protector for overlampping.
- Adjustable hanger bars up to 24" and can be repositioned for easy installation.
- (7) 1/2" and (4) Romex knockouts with pry-out slots.
- Air-tight housing prevents airflow attic and living areas.
- Junction box UL listed for through-branch circuit wiring.

REFLECTOR

- Semi-specular, low-iridescent aluminum reflector.
- Available in clear and white finishes.

BALLASTS

Electronic 120V ballast: 13/18/26w, 4-Pin lamp type, UL listed, HPF, Class P, Sound rated A, Starting temperature: 0 degree F, Max. THD: <10%.

EMERGENCY OPTIONS



Emergency battery option available for 90 minute lamp operation. Includes charger, inverter circuit and is factory-installed.

LISTINGS

- UL Damp Location/Feed Through listed.
- UL listed for direct contact insulation.
- CSA Certified
- IP Rated
- Meets State of California Title 24 requirements.


Dimensions

A	Height	7-1/2"
B	Trim Opening	5-1/2"
C	Width	7-1/2"
D	Length	10-1/2"

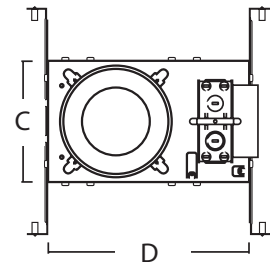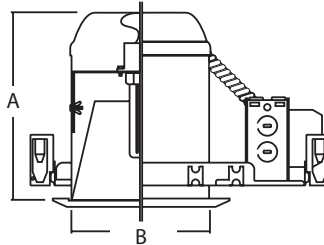

Ordering Matrix and Options

Series	Lamp Type	Voltage
PRA5X PL AT	13 (1) 13w 18 (1) 18w 26 (1) 26w	blank -120V (Consult factory for others).

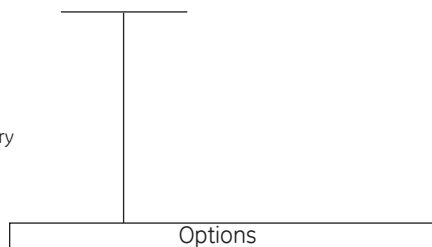

EL: Electronic ballast
EM: Emergency w/ remote test switch
LPI (): Lamp included (Specify lamp type and color)
 (Consult factory for available configurations.)

Example: **PRA5XPLAT-26EL / PR505C**

PR50()	Reflector	Trim
Cat. #	C: Clear W: White	blank: White (plastic trim) C: Clear

(See attached reflector and trim options for more details.)

Manufacturer reserves the right to make changes to specifications without notice.